

Tabla 1 Diámetro interior de anillos forjados para pistón

Número de la muestra	Observaciones					
1	74.030	74.002	74.019	73.992	74.008	
2	73.995	73.992	74.001	74.011	74.004	
3	73.988	74.024	74.021	74.005	74.002	
4	74.002	73.996	73.993	74.015	74.009	
5	73.992	74.007	74.015	73.989	74.014	
6	74.009	73.994	73.997	73.985	73.993	
7	73.995	74.006	73.994	74.000	74.005	
8	73.985	74.003	73.993	74.015	73.988	
9	74.008	73.995	74.009	74.005	74.004	
10	73.998	74.000	73.990	74.007	73.995	
11	73.994	73.998	73.994	73.995	73.990	
12	74.004	74.000	74.007	74.000	73.996	
13	73.983	74.002	73.998	73.997	74.012	
14	74.006	73.967	73.994	74.000	73.984	
15	74.012	74.014	73.998	73.999	74.007	
16	74.000	73.984	74.005	73.998	73.996	
17	73.994	74.012	73.986	74.005	74.007	
18	74.006	74.010	74.018	74.003	74.000	
19	73.984	74.002	74.003	74.005	73.997	
20	74.000	74.010	74.013	74.020	74.003	
21	73.988	74.001	74.009	74.005	73.996	
22	74.004	73.999	73.990	74.006	74.009	
23	74.010	73.989	73.990	74.009	74.014	
24	74.015	74.008	73.993	74.000	74.010	
25	73.982	73.984	73.995	74.017	74.013	

Tabla 2 Distribución de frecuencias para los valores de diámetro interior de anillos de pistón

Diámetro del anillo, x (mm)	Frecuencia	Frecuencia Acumulativa	Frecuencia relativa	Frecuencia relativa acumulada
73.965 ≤ x ≤ 73.970	1	1	0.008	0.008
73.970 ≤ x ≤ 73.975	0	1	0.000	0.008
73.975 ≤ x ≤ 73.980	0	1	0.000	0.008
73.980 ≤ x ≤ 73.985	8	9	0.064	0.072
73.985 ≤ x ≤ 73.990	10	19	0.080	0.152
73.990 ≤ x ≤ 73.995	19	38	0.152	0.304
73.995 ≤ x ≤ 74.000	23	61	0.184	0.488
74.000 ≤ x ≤ 74.005	22	83	0.176	0.664
74.005 ≤ x ≤ 74.010	22	105	0.176	0.840
74.010 ≤ x ≤ 74.015	13	118	0.104	0.944
74.015 ≤ x ≤ 74.020	4	122	0.032	0.976
74.020 ≤ x ≤ 74.025	2	124	0.016	0.992
74.025 ≤ x ≤ 74.030	1	125	0.008	1.000

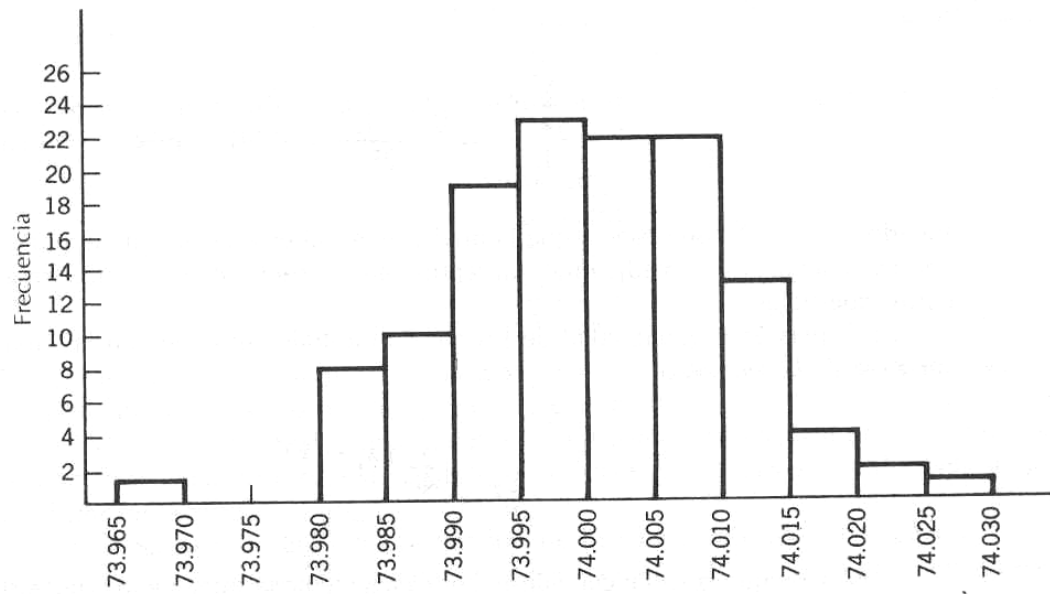


Gráfico 1

Histograma de los datos de diámetro de los anillos de pistón.